

MagTek IA

Thermally Insulated Aluminium Manual Attack Resistant Doors Windows and Partitions





Reducing the consumption of energy in buildings and protecting the environment is a major challenge for many companies

Gunnebo's manual attack resistant doors have been designed to satisfy the ever increasing need to protect people, property and assets from theft and attack, whilst maintaining an elegant appearance and saving energy.

The MagTek IA range is made up of enhanced manual attack resistant doors to protect against vandalism. It features fully certified doors that have been tested by independent bodies in accordance with the relevant European standards and is compliant with the Directive 2010/31 of the European Parliament on the energy performance of buildings. This way, Gunnebo can be sure of meeting all client requirements and expectations, providing a solution that offers the right protection against the identified risk.

Since aluminium is a material that is easy to shape and form, the MagTek IA is an optimal solution that combines design and functional requirements.

The ease with which they can be integrated into buildings and the wide range of design choices available (dimensions, finishes and colours) mean that MagTek IA doors are versatile, and can be used for both building refurbishments and new constructions.

The MagTek IA range also includes a selection of partitions so that complete facade or enclosure solutions can be designed.

Key features

- 1. Elegant appearance.
- 2. Resistance against manual attack.
- 3. Reduction of the consumption of energy in the building
- 4. Wide range of finishes and dimensions available.
- 5. Complementary windows and partitions.
- 6. Aluminium is a green product. It can be recycled infinitely without compromising the quality.

Material

Framework	Thermally insulated extruded aluminium profile with the inclusion of special steel armour depending upon the resistance level
Infill	Laminated security glass or solid infill made of an aluminium panel on the attack side and white colour laminate on the secure side
Finish	Powder coat to RAL 9010, 9006, 7035 or 7037

Standard Equipment

Locking	3-point mechanical Euro Lock
Handle	Pad handle on both sides

Construction

Opening	Up to 150° (depending on model)
DIN	Left or right
Standard clear opening	900mm at 90° opening: 1 leaf
	1400mm at 90° opening: 2 leaves

Reference Standard

The MagTek IA is tested to EN 1627 for the complete doorset. Standard EN 1627 includes 3 level of tests. The physical attack component which includes different sets of tools and attack times is in accordance with EN 1630.

Models

- Thermally Insulated Enhanced Manual Attack Resistant Doors – MagTek IAO Lite & IA3 Lite
- Thermally Insulated Certified Manual Attack Resistant Doors – MagTek IA4

Options

Alternative RAL colours or anodised finish*

Leaf position contact switch

- High security cylinder
- Choice of mechanical Euro locks and electric locks
- Push buttons
- Choice of handle types
- Anti-panic bar (depending upon model)
- Upgrade to bullet resistance (depending upon model)

* Finishing is compliant with the highest Qualicoat and Qualanod quality standards

Applications


- Banks
- Embassies
- Govenment buildings
- Military sites
- Cash Centers
- Police stations
- Prisons
- ...

Range Composition

MagTek IA0 Lite and MagTek IA3 Lite









IAO-S Lite double leaf IA3-S Lite double leaf

IAO-H Lite IAO-H Lite double leaf IA3-H Lite IA3-H Lite double leaf

MagTek IA4

IAO-S Lite IA3-S Lite

Partitions MagTek IA



Windows MagTek IA



IA0-G Lite | IA3-G Lite | IA4-G

IA0-G Lite | IA3-G Lite | IA4-G

Standard technical specifications

Model Type				Overall dimension of the door		Door opening at 90°			
	Туре	Rating	Leaf options	Total standard width: W (Single/ Double) (mm)	Total standard height: H (mm)	Passage width (mm)	Passage height (mm)	Aluminium framework	Infill
MagTek IA0-S Lite	Enhanced Manual Attack	_	Single/ Double	1150/ 1720	2130	900/ 1400	2060/ 2060	75mm thick	Solid
MagTek IA0-G Lite	Resistant Doors	_							Glazed
MagTek IA3- S Lite		Level CR3 to EN 1627-30	Single/ Double	1150/ 1720	2130	900/ 1400	2060/ 2060	75mm thick	Solid
MagTek IA3-G Lite	Certified Manual Attack								Glazed
MagTek IA4-S	Resistant Doors EN 1627-30	Resistant	Cingle	1150	2120	000	2050	92mm thick	Solid
MagTek IA4-G		Single	1150	2130	900	2050	9211111 UNICK	Glazed	

Optional technical specifications

Model	FB3 to FB6 bullet resistance	Overall dimens		
		Non standard width (Single/Double) (mm)	Non standard height (mm)	Electric locking
MagTek IA0-S Lite MagTek IA0-G Lite	_	910–1300 / 1210–2400	2050–2500	0
MagTek IA3- S Lite MagTek IA3-G Lite	_	910–1300/ 1210–2400	2050–2500	0
MagTek IA4-S MagTek IA4-G	0	980–1280	2050–2500	0


Thermal Insulation Performance for the Profile

75mm framework: UF=2,2 W/m²K. EN ISO 10077-2 **92mm framework:** UF=2,49 W/m²K. EN ISO 10077-2

Dimensions (mm)


	Door	W Overall Width	PW Passage Width (90°)	COW Clear opening width	H Overall Height	PH Passage Height
MagTek A Lite (75mm-thick)	Single	W	W-240	W–160	Н	H–75
	Double	W	W-320	W–160	Н	H–75
MagTek A (92mm-thick)	Single	W	W–220 (OO) W–250 (IO)	L–140 (OO) L–165 (IO)	Н	H–70 (OO) H–82 (IO)

OO: Outward Opening IO: Inward Opening



* Valid for MagTek IA doors, windows and partitions

Site Preparation

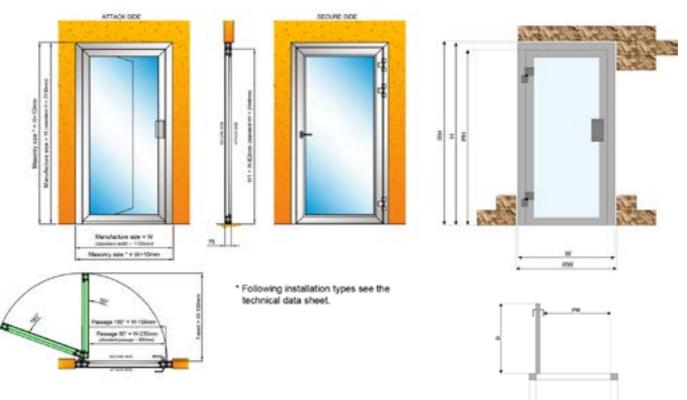

Drawings are also available for the partitions and windows.

Notice: • Product performance depends upon the quality of its installation. All installation details are provided in the MagTek A Installation Manual. • Certificates for manual attack resistance are available on demand. Contact Gunnebo for any certificate requests.

The Gunnebo Security Group is a global leader in security products, services and solutions with an offering covering cash handling, safes and vaults, entrance security and electronic security for banks, retail, CIT, mass transit, public & commercial buildings and industrial & high-risk sites.

Gunnebo – we make your world safer.



