

# More Precision.



## optris® CT G5

Precise noncontact temperature measurement  
of glass from 100 to 1650°C



### FEATURES

- Accurate temperature measurement of flat glass, container glass, light bulb manufacturing, car glass production and manufacturing of photovoltaic cells from 100°C to 1650°C
- Applicable up to 85°C ambient temperature without cooling

General specifications	
Environmental rating	IP 65 (NEMA-4)
Ambient temperature	sensing head: -20 - 85°C electronics: 0 - 85°C
Storage temperature	sensing head: -40 - 85°C electronics: -40 - 85°C
Relative humidity	10 - 95%, non condensing
Vibration (sensor)	IEC 68-2-6: 3 G, 11 - 200 Hz, any axis
Shock (sensor)	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	sensing head 42 g electronics 420 g
Electrical specifications	
Outputs/analog	channel 1: 0/4 - 20 mA, 0 - 5/10 V, thermocouple J, K  channel 2: sensing head temperature (-20 - 85°C as 0 - 5 V or 0 - 10 V), alarm output
Alarm output	Open - collector (24V / 5mA)
Optional	relay: 2 x 60 V DC/42 V AC <sub>eff</sub> ; 0.4 A; optically isolated
Outputs/digital (optional)	USB, RS232, RS485 (optional), CAN-Bus, Profibus DP, Ethernet
Output impedances	mA max. 500 Ω (with 8 - 36 V DC) mV min. 100 kΩ load impedance thermocouple 20Ω
Inputs	programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger
Cable length	3 m (standard), 8 m, 15 m
Current draw	max. 100 mA
Power supply	8 - 36 V DC


Measurement specifications	
Temperature range (scalable via programming keys or software)	100°C - 1200°C (G5L) 250°C - 1650°C (G5H)
Spectral range	5.2 μm
Optical resolution (90 % Energy)	10:1 (G5L) 20:1 (G5H)
System accuracy (at ambient temperature 23 ±5°C)	±1% or ±2°C <sup>1</sup>
Repeatability (at ambient temperature 23 ±5°C)	±0.5% or ±0.5°C <sup>1</sup>
Temperature resolution (NETD)	0.1°C (G5L) / 0.2°C (G5H)
Response time (90 % Signal)	80 ms (G5H) / 120 ms (G5L)
Emissivity/Gain (adjustable via programming keys or software)	0.100 - 1.100
Transmissivity/Gain (adjustable via programming keys or software)	0.100 - 1.100
Signal processing (parameter adjustable via programming keys or software, respectively)	peak hold, valley hold, average; extended hold function with threshold and hysteresis

<sup>1</sup> whichever is greater


# optris® CT G5

## Optical specifications

10:1 optics


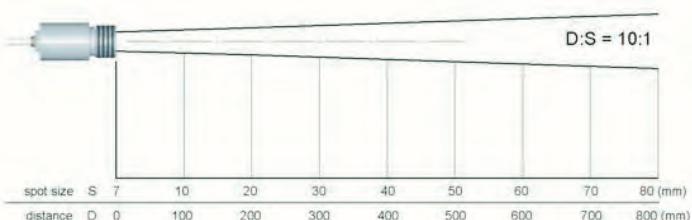


20:1 optics

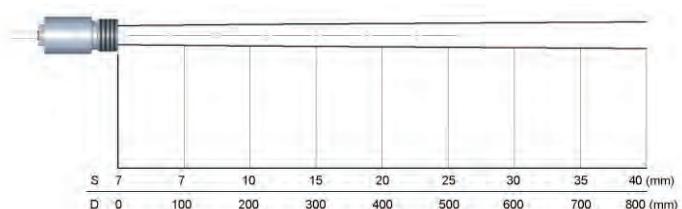

## Dimensions


Sensing head

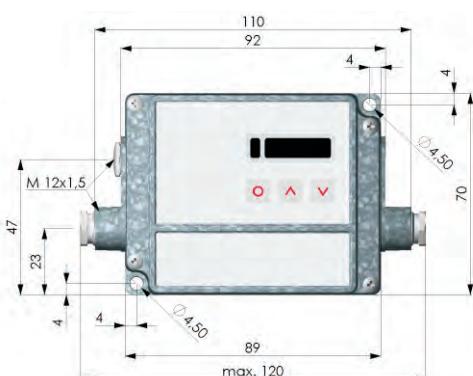

Electronics



## Compact Connect Software

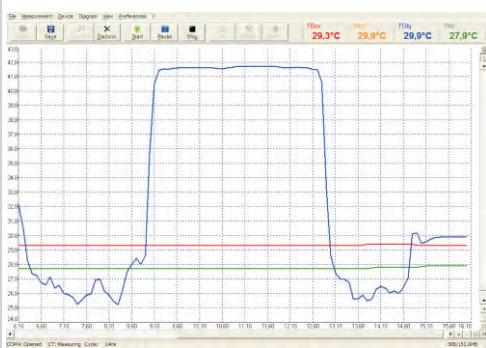

- Software for easy sensor setup and remote controlling, supports multi tasking
- Graphic display for temperature trends and automatic data logging for analysis and documentation with 1 ms response time
- Adjustment of signal processing functions and programming of outputs and functional inputs of the sensor
- Automatic emissivity adjustment
- The software CompactConnect allows to customize the sensor to application needs of the user