


Digital Depth Gage 30 EX



Features

Functions:

ON/OFF
0 (Zero setting)
mm/inch
PRESET (for entering a numerical value)
DATA (Data transmission via connection cable)




- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Max measuring speed 1.5 m/sec (60"/sec)
- High contrast LCD with 7.5 mm high digits
- Dirt wipers are integrated in the slide
- Scope of supply: Case, battery

Technical Data

Measuring range mm (inch)	Resolution mm/inch	Error limit G mm/inch	Order no.
150 (6")	0.01/ .0005"	0.03/ .0015"	4126500
300 (12")	0.01/ .0005"	0.04/ .0020"	4126501
500 (20")	0.01/ .0005"	0.05/ .0020"	4126502

Depth measurement

Distance measurement

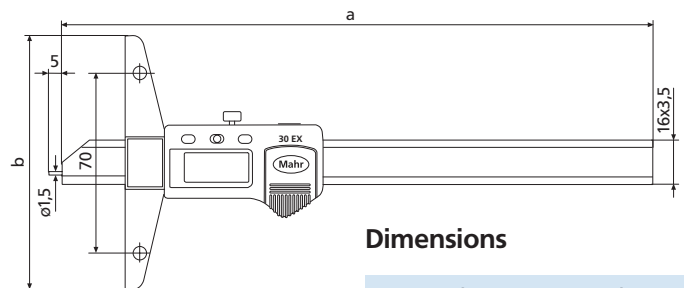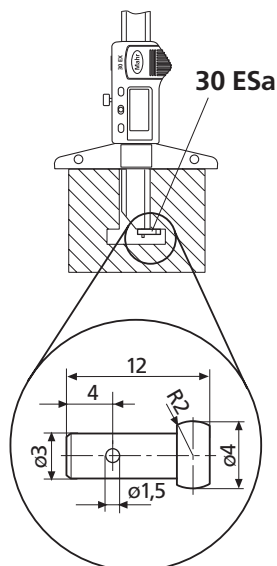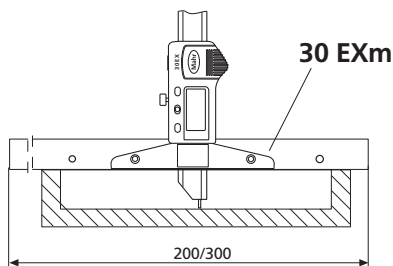

Dimensions

mm/inch	a	b
150/ 6	234/ 9.2	100/ 4
300/12	384/ 15.1	150/ 6
500/20	584/ 23	150/ 6

Accessories

	Order no.
Battery 3V, Type CR 2032	4102520
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411
Cross Beam Extension 200 mm	30 EXm 4126511
Cross Beam Extension 300 mm	30 EXm 4126510
Anvil for distance measurement for fixing to measuring pin	30 ESa 4125611

Accessories for Data Processing see Chapter 11