
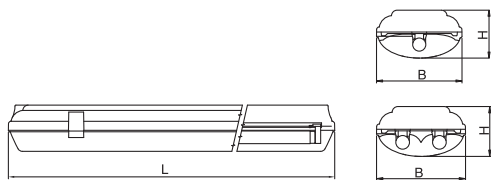


# Leader | BS100, BS100 Basic, BS110

Industrial luminaires T8, T5 (highly polished polycarb. refl. BS100, BS110, white polycarb. reflector BS100 Basic)

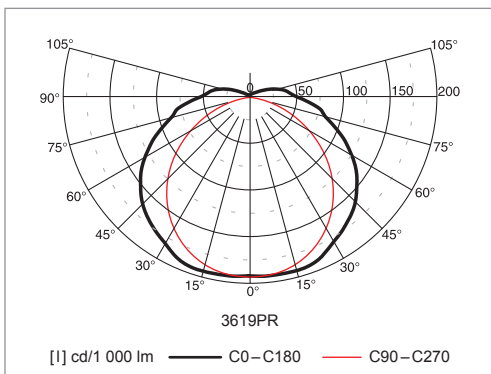

## Material:

- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: highly polished polycarbonate (BS100, BS110), white polycarbonate reflector (BS100 Basic)
- diffuser: clear polycarbonate

**Degree of protection:** IP66

**Rated voltage:** 230 V/50 Hz

**Control gear:** electronic ballast with the highest energy savings. Dimmable ballasts, fast connectors Wieland, MPM and emergency versions are on request

**Mounting:** separate or in-line mounting on ceilings or walls, suspension on chain pendants

The luminaires are supplied with ceiling holders (2pcs), lifting eyes (2pcs) and a lead-in insulator (1pc).

**Accessories:** (must be ordered separately)

- 99-541 – a guard for 18/2×18W luminaires (1pc)
- 99-542 – a guard for 36/2×36W luminaires (1pc)
- 99-543 – a guard for 58/2×58W luminaires (1pc)
- 99-544 – stainless steel fasteners for 18/2×18W luminaires (4pcs)
- 99-545 – stainless steel fasteners for 36/2×36W luminaires (8pcs)
- 99-546 – stainless steel fasteners for 58/2×58W luminaires (10pcs)
- 99-547 – wall cantilevers (1pc) – for one luminaire 2pcs needed
- 8010 – a set of interconnecting cables for 58W
- 8012 – a set of interconnecting cables for 36W

**Application:** factory halls, washrooms, storehouses, farms

The luminaires can be used in covered outdoor areas.

	Code	Power	Lamp	Cap	L × B × H (mm)	Kg
BS100	3616PR	1×18W	T8	G13	670 × 170 × 95	1,5
	3618PR	1×36W	T8	G13	1 280 × 170 × 95	2,4
	3620PR	1×58W	T8	G13	1 580 × 170 × 95	2,9
	3617PR	2×18W	T8	G13	670 × 170 × 95	1,5
	3619PR	2×36W	T8	G13	1 280 × 170 × 95	2,4
	3621PR	2×58W	T8	G13	1 580 × 170 × 95	2,9
BS100 Basic	3619RE	2×36W	T8	G13	1 280 × 170 × 95	2,4
	3621RE	2×58W	T8	G13	1 580 × 170 × 95	2,9
BS110	3715	1×28W	T5	G5	1 280 × 170 × 95	2,5
	3716	1×35W	T5	G5	1 580 × 170 × 95	2,9
	3718	2×28W	T5	G5	1 280 × 170 × 95	2,7
	3719	2×35W	T5	G5	1 580 × 170 × 95	3,0
	3710	1×49W	T5	G5	1 580 × 170 × 95	2,9
	3711	2×49W	T5	G5	1 580 × 170 × 95	3,0
	3712	1×54W	T5	G5	1 280 × 170 × 95	2,5
	3713	2×54W	T5	G5	1 280 × 170 × 95	2,7

The fixtures are not equipped with the lamps.