

### Specifications

Models	GS-2669 RT		GS-3369 RT		GS-4069 RT	
Measurements	Metric	US	Metric	US	Metric	US
Working height maximum*	9.70 m	31 ft 9 in	11.75 m	38 ft 6 in	14.12 m	46 ft 3 in
<b>A</b> Platform height maximum	7.70 m	25 ft 3 in	9.75 m	31 ft 11 in	12.12 m	39 ft 9 in
<b>B</b> Platform height - stowed	1.47 m	4 ft 10 in	1.47 m	4 ft 10 in	1.65 m	5 ft 5 in
<b>C</b> Platform length - outside	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in
extended <sup>1</sup>	4.31 m	14 ft 2 in	4.31 m	14 ft 2 in	4.31 m	14 ft 2 in
Slide-out platform extension deck <sup>1</sup>	1.52 m	5 ft	1.52 m	5 ft	1.52 m	5 ft
<b>D</b> Platform width - outside	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in
Toeboard height	0.15 m	6 in	0.15 m	6 in	0.15 m	6 in
<b>E</b> Height - stowed**	2.59 m	8 ft 6 in	2.59 m	8 ft 6 in	2.74 m	9 ft
rails lowered	1.92 m	6 ft 3.5 in	1.92 m	6 ft 3.5 in	2.08 m	6 ft 10 in
<b>F</b> Length - stowed	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in
platform extended <sup>1</sup>	4.50 m	14 ft 9 in	4.50 m	14 ft 9 in	4.50 m	14 ft 9 in
with outriggers	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in
<b>G</b> Width	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
<b>H</b> Wheelbase	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
<b>A</b> Ground clearance - center	0.24 m	9.5 in	0.24 m	9.5 in	0.24 m	9.5 in

### Productivity

Maximum platform occupancy (in/out)	4/4		4/2		3/2	
Lift capacity	680 kg	1,500 lbs	454 kg	1,000 lbs	363 kg	800 lbs
lift capacity - extension deck	136 kg	300 lb	136 kg	300 lb	136 kg	300 lb
Drive height	full height		full height		full height	
Drive speed - stowed	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph
Drive speed - raised	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph
Gradeability - stowed***	40%		35%		35%	
Maximum outrigger levelling:	front/back uphill		5.3°/4.2°		5.3°/4.2°	
side to side	11.7°		11.7°		11.7°	
Turning radius - inside	2.11 m	83 in	2.11 m	83 in	2.11 m	83 in
Turning radius - outside	4.6 m	181.2 in	4.6 m	181.2 in	4.6 m	181.2 in
Raise/lower speed	36/33 sec		42/28 sec		69/46 sec	
Controls	proportional		proportional		proportional	
Drive	four wheel		four wheel		four wheel	
Tyres - rough terrain	30x66 cm	12x26 in	30x66 cm	12x26 in	30x66 cm	12x26 in

### Power

Power source	Kubota D-1105 Diesel 24.8 hp Perkins 403D-11 Diesel 25 hp		Kubota D-1105 Diesel 24.8 hp Perkins 403D-11 Diesel 25 hp		Kubota D-1105 Diesel 24.8 hp Perkins 403D-11 Diesel 25 hp	
Fuel tank capacity	37.9 L	10 gal	37.9 L	10 gal	37.9 L	10 gal
Hydraulic system capacity	68.1 L	18 gal	68.1 L	18 gal	68.1 L	18 gal

### Sound & Vibration Levels


Sound pressure level (ground workstation)	85 dBA	85 dBA	85 dBA	85 dBA	85 dBA	85 dBA
Sound pressure level (platform workstation)	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA
Vibration	<2.5 m/s <sup>2</sup>	8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	8 ft 2 in/s <sup>2</sup>

### Weight\*\*\*\*

CE base machine	3,376 kg	7,443 lbs	3,557 kg	7,842 lbs	4,744 kg	10,459 lbs
The basic unit has the extension deck, foam filled RT tyres (or non marking RT tyres as option), CE link guard and CE load sense.						
Unit weight modifiers for options						
Outriggers	add 392 kg	865 lbs	add 392 kg	865 lbs	add 392 kg	865 lbs
Generator	add 73 kg	160 lbs	add 73 kg	160 lbs	add 73 kg	160 lbs

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);  
2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

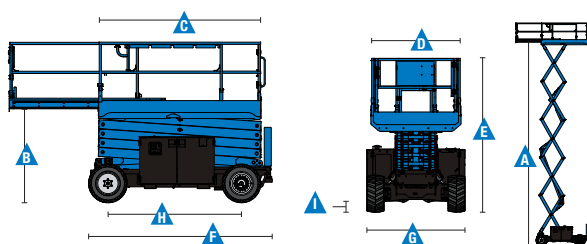

<sup>1</sup> An extension deck of 1.52 m (5 ft) is standard on machines fitted with the standard outriggers

\* The metric equivalent of working height adds 2 m to platform height.  
\*\* Based on RT tyres. Deduct 5.8 cm (2 in) for non-marking tyres.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

### Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

#### Measurements

##### GS-2669 RT

- 9.70 m (31 ft 9 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

##### GS-3369 RT

- 11.75 m (38 ft 6 in) working height
- Up to 454 kg (1,000 lbs) lift capacity

##### GS-4069 RT

- 14.12 m (46 ft 3 in) working height
- Up to 363 kg (800 lbs) lift capacity

#### Productivity

- Drive at full height
- Folding guardrail with full height swing gate
- Platform controls with fault indicator
- Proportional lift and drive
- AC power to platform
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Horn
- Hour meter
- Hydraulic oil cooler
- Certified load sensor
- Telematics-Ready Connector

#### Power

- All engines are emissions compliant
- Swing-out engine tray

#### Platform

- 2.79 x 1.60 m (9 ft 2 in x 5 ft 3 in) steel frame platform with replaceable aluminium deck
- 1.52 m (5 ft) slide-out extension deck

#### Outriggers

- Automatic levelling hydraulic outriggers

#### Engine Options

- Kubota diesel 24.8 hp (18.5 kw)
- Perkins diesel 25 hp (19.5 kw)

#### Drive

- 4 x 4

#### Axle

- Front oscillating axle

#### Tyre Options


- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

#### Productivity Options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Biodegradable hydraulic oil<sup>(1)</sup>
- Track & Trace<sup>(2)</sup> (GPS unit providing machine location & operating information)
- Motion alarm

#### Power Options

- AC generator (110 V / 60 Hz or 240 V/50 Hz, 3000 W)<sup>(1)</sup> with oil cooler
- Hydraulic generator 110 V/50 Hz or 240 V/ 50 Hz with oil cooler
- Diesel catalytic scrubber muffler<sup>(3)</sup>
- Low temperature cut-out module
- Engine heater <sup>(4)</sup>

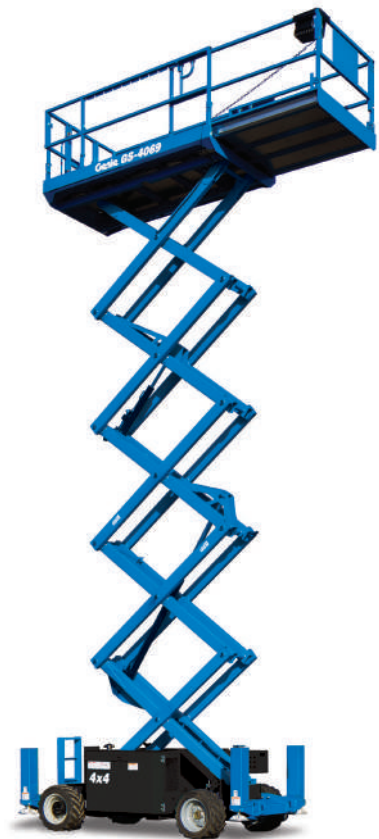

08/17 Part No. B127284UK

<sup>(1)</sup> Factory-fit option only

<sup>(2)</sup> Includes a first 2 years subscription

<sup>(3)</sup> Available with Perkins engine only.

<sup>(4)</sup> Available with standard Kubota engine only

### United Kingdom

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com  
Visit [www.genielift.co.uk/locations](http://www.genielift.co.uk/locations) to view our global locations list.

### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2017 Terex Corporation.

