

Hiab Multilift

# XR Power range hooklifts




**TECHNICAL INFORMATION**

# XR21S

## TECHNICAL DATA

TYPE	XR21S						
VEHICLE TYPE	3 axle						
GVW OF THE VEHICLE (t)	26						
CAPACITY (t)	21						
G-LENGTH	46	51	53	56	59	61	63
SYSTEM WEIGHT (kg) *	2290	2380	2470	2500	2530	2550	2590
TIPPING ANGLE (°)	50	49	53	53	53	49	46
MAX. OPERATING PRESSURE (MPa)	30						
RECOMMENDED MAX. OIL FLOW (l/min)	100 (special 150)						

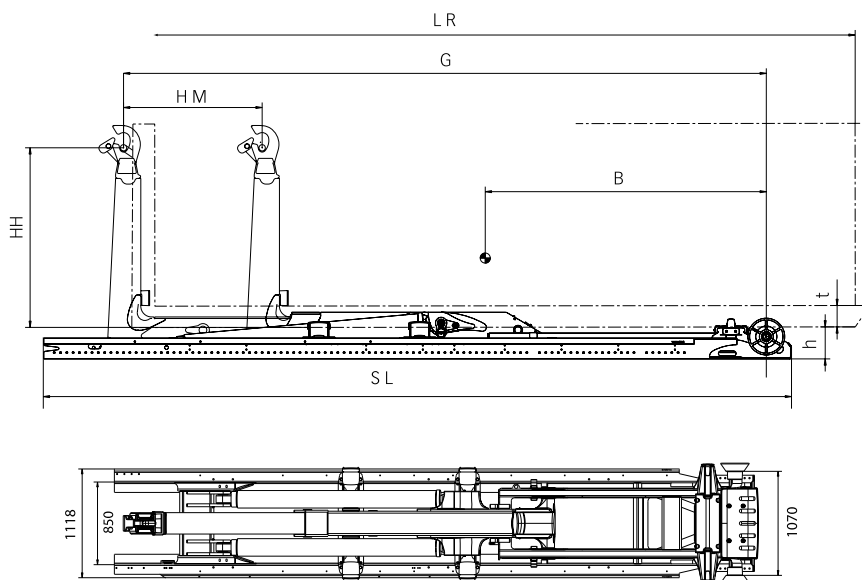

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

## PRIMARY DIMENSIONS

MODEL	XR21S.46	XR21S.51	XR21S.53	XR21S.56	XR21S.59	XR21S.61	XR21S.63
LR = BODY LENGTH (m) min - max	4,0 - 5,6	4,3 - 6,1	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1	5,1 - 7,3
SL = SUBFRAME LENGTH (mm) **	5333	5933	6563	6563	6563	6733	6783
B = CENTRE OF GRAVITY (mm)	2450	2700	2850	2950	3000	3150	3300
G = EXACT G-LENGTH (mm)	4580	5080	5360	5560	5860	6080	6310
HM = HORIZONTAL MOVEMENT (mm)	900	1100	1100	1300	1450	1450	1450
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	105						
h = INSTALLATION HEIGHT (mm)	270						
HH = HOOK HEIGHT (mm)	1570						

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. [www.cargotec.com](http://www.cargotec.com)



**Cargotec Finland Oy**  
 Nesteentie 36, P.O.Box 39  
 FI-21201 Raisio, Finland  
 tel. +358 204 55 2399  
 fax +358 204 55 2231  
[www.hiab.com](http://www.hiab.com)