

2200 Series

print and apply systems ■ ■ ■

Markem-Imaje's commitment: to deliver best in class efficiency.

The 2200 Series builds on a proven concept providing reliability, efficiency and ease of use with thousands of units installed in demanding 24/7 environments. The 2200 Series takes print and apply to the next stage of evolution, giving you a wide range of interchangeable applicators, optimized operational intervention and unparalleled application rate.



Unmatched reliability

- Durable and rugged industrial design constructed around a central solid 38 mm thick backbone.
- High performance non-stick label pad and contact parts for easy to clean, uncomplicated operation.

Operation optimization

- Simple media path allows operators to reload label and ribbon rolls in less than 40 seconds.
- 660 m ribbon and label rolls compared with the market standard of 450 m to reduce the line stoppages by 45%.
- Synchronized label and ribbon change.
- «No tools» concept allows printhead and roller exchanging in less than 60 seconds.
- CoLOS Terminal®, the new color touch screen, enables easy selection of labels to be printed and powerful data management through an intuitive user interface.

Eco-initiatives


- Designed to be over 95% recyclable.
- Compatible with recyclable liners.
- Power consumption below 35 watts in standby mode and 135 watts at maximum throughput.

High-performance printing

- Ability to print and apply at rates up to 125 packs per minute regardless of the data complexity or content.
- Dual RISC processors, supported by a dedicated ultra fast co-processor, deliver efficient performance.
- Consistent label application of ± 0.25 mm via optimized label path, automatic label tension and integrated pad label sensor.
- Markem-Imaje labels and ribbons guarantee print quality and long printhead life.

Traceability

- Compliant ANSI grade A/B codes even at the highest application speed.
- Optional barcode scanner ensures that 100% of cases leave the factory with a readable barcode.
- Supports high speed real time data generation, including linear and 2D barcodes, graphics or serialization.
- CoLOS software solutions ensure product data integrity, central data management and easy connection to existing enterprise database.

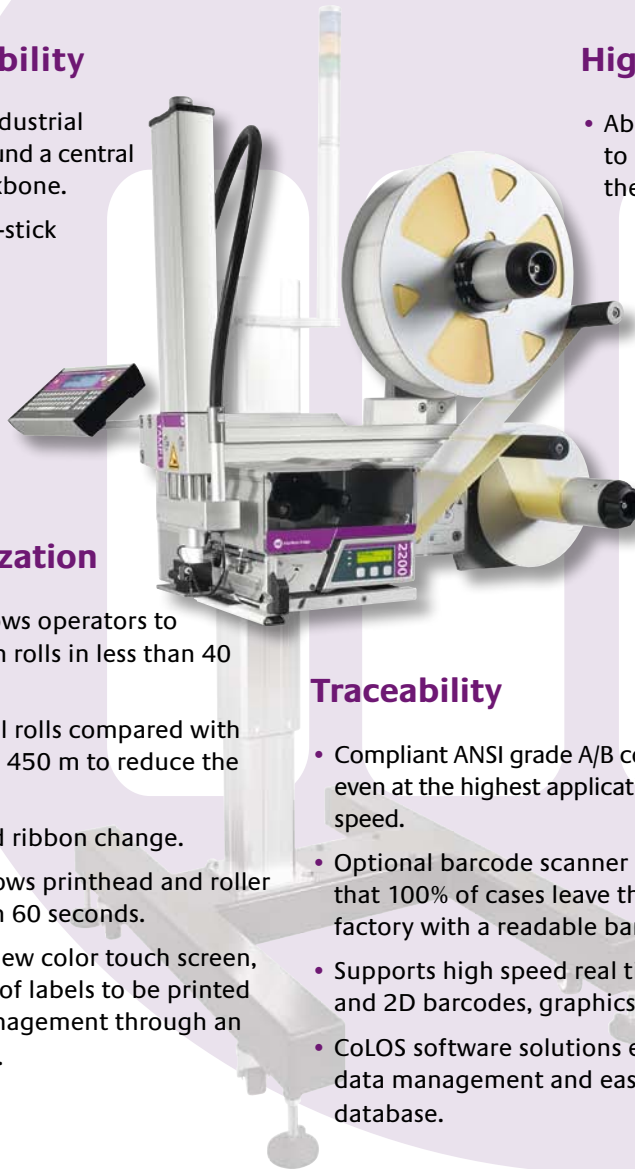

markem·imaje

a DOVER company


2200 Series specifications ■ ■ ■

Print features ■ ■ ■

- Print methods: Thermal transfer or direct thermal
- Built-in real-time clock
- 10 individual programmable counters
- Print engines:
 - 2220: 56 mm, 200 dpi (8 dots per mm)
 - 2230: 54 mm, 300 dpi (12 dots per mm)
 - 2420: 104 mm, 200 dpi (8 dots per mm)
 - 2430: 108 mm, 300 dpi (12 dots per mm)
 - 2620: 168 mm, 200 dpi (8 dots per mm)
 - 2630: 162 mm, 300 dpi (12 dots per mm)
- Maximum print speed: 300 mm/s
- Fonts: 16 smooth scalable fonts available
- TrueType font downloadable
- Support for Unicode fonts
- Graphic features: BMP, WMF, PCX, PNG, ICO, GIF, TIFF, JPEG
- All major linear barcodes and 2D barcodes supported

Media specifications ■ ■ ■

- Media types: Die-cut self-adhesive labels
- Label stock outside wound as standard
- Maximum label width: 178 mm
- Maximum label roll: 350 mm
- Inner core: 76 mm
- Inside wound thermal transfer ribbon
- Ink ribbon length: 660 mm
- Ribbon core: 25 mm

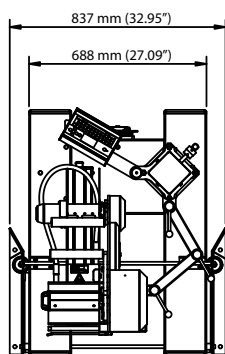

Dimensions refer to 2200 Tamp Long

Operations ■ ■ ■

- User interface with graphic display and machine status in 26 languages
- Keypad: start, pause, print
- Communication interface:
 - 2 x In via Opto, 5 x Out via relay, 24 VDC
 - High speed RS-232, 300 - 115 200 bps
 - Ethernet 10/100 (LPD, R Telnet, FTP, web server)
 - USB for back up/restore and label upload (simple user interface)

Other characteristics ■ ■ ■


- Applicators:
 - Tamp, Blow, Wipe or Tamp Blow for top, side and front applications
 - High Speed Front Apply
 - Corner Wrap for 2 adjacent side applications
- Humidity: 20 to 85% non-condensing
- Power requirements: 110/240 VAC; 50/60 Hz
- Air supply: 6 bars, dry and clean

Options and accessories ■ ■ ■

- Inside wound label kit
- Local industrial terminal with QWERTY keypad and backlit display
- Enhanced on board user interface:
 - Label selection
 - Machine back-up/restore or cloning
- Expanded memory SD card slot
- Scalable and international fonts
- Three-color-status beacon
- Barcode reader
- Range of industrial stands
- CoLOS Terminal

Software ■ ■ ■

- Compatible with CoLOS Create Professional and CoLOS Enterprise
- CoLOS Traceability software
- Compatible with Weihenstephan standard

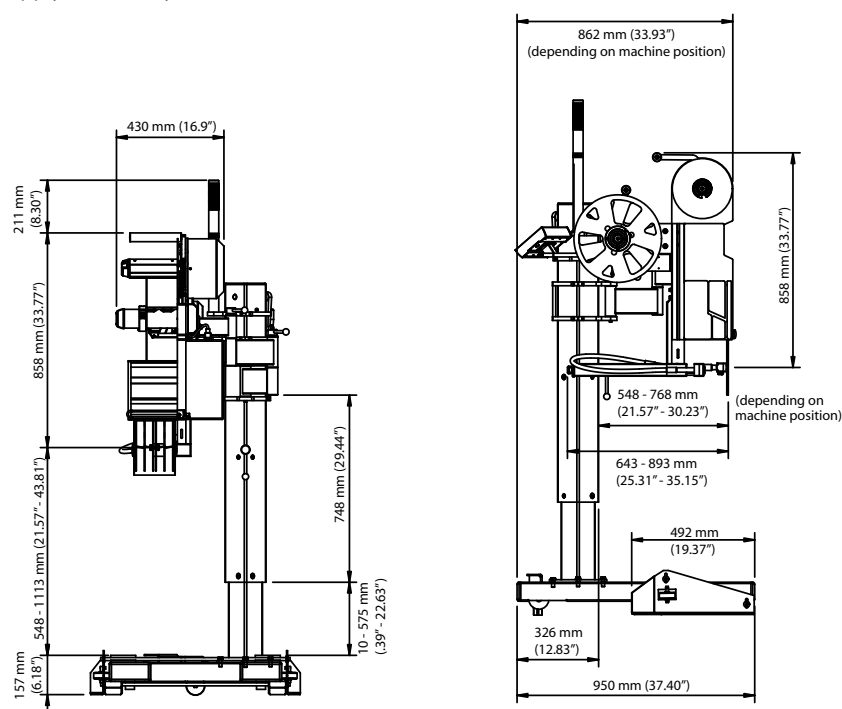

To learn more, scan the code with your smartphone or visit www.markem-imaje.com



We reserve the right to amend the design and/or specifications of our products without notice.

Markem-Imaje
Global Sales & Marketing Division
9, rue Gaspard Monge
B.P. 110
26501 Bourg-lès-Valence Cedex - France
Tel: +33 (0) 4 75 75 55 00
Fax: +33 (0) 4 75 82 98 10


markem·imaje
a DOVER company