



RTSC3

Trench Rollers



The smart remote-controlled vibratory trench roller

The RT trench roller is ideally suited for the compaction of excavations and sub bases of foundations, roads and parking lots. The compaction of cohesive soils is the RT's specialty. The sheepfoot drums, together with the adjustable centrifugal force, achieve optimum results. Available in two different drum widths. The remote control system uses infrared technology for maximum safety: The machine is disabled as soon as the line of sight between operator and device is lost. The proximity recognition sensor stops the RT as soon as it moves within 2 m of the operator. Available with the choice of Kohler or Kubota engine.

- A patented third infrared receiving eye on top of the Trench Roller provides permanent contact with the remote control even in the trench shoring.
- The base plate is completely maintenance free, because the drive system and exciter are provided with a permanent lubrication. That makes it most economical to run throughout its whole service life.
- The below the axle exciter in each drum allows for more efficient transfer of compaction energy to the soil for superior compaction results. In addition, the low position of the exciters improves the stability of the machine and lowers the risk of the device toppling over.
- The engine control module with diagnostic LEDs monitors machine functions such as oil pressure, radiator level, engine temperature, glow plug, battery and air filter capacity.
- RTx-SC3 - two rollers in one: The attachment drums allow for an easy change between 82 and 56cm. The mounting points are near the hub, protected against heavy pollution and deformation. Scraper bars in two different widths and blind screws for locking the threaded holes with a narrow operating width are included in the standard package.





Compatec – compaction control

- Compatec indicates the relative compaction level of the soil. Maximum compaction has been reached once the number of lights stops increasing.
- Overload Indication: All lights will flash to tell the operator that they are operating the machine on too hard of a surface and potentially causing damage to the machine.
- Compatec is available installed from the factory or as an accessory kit.



Third infrared receiving eye

A prominently placed infrared receiving eye on top of the Trench Roller ensures that the remote control contact is maintained permanently, even in the trench shoring.

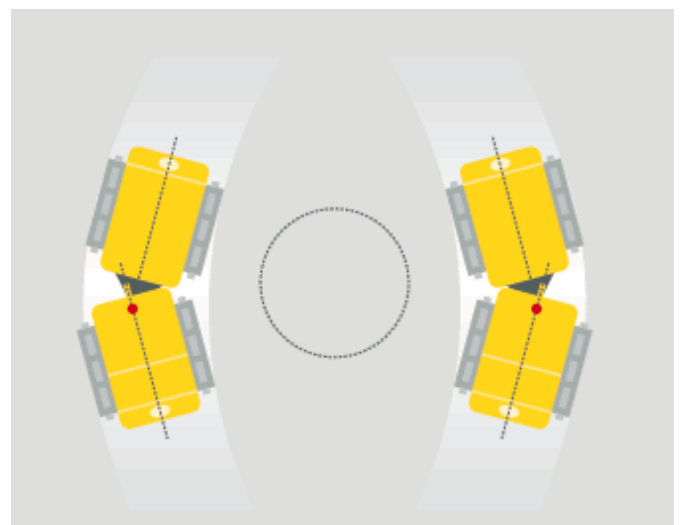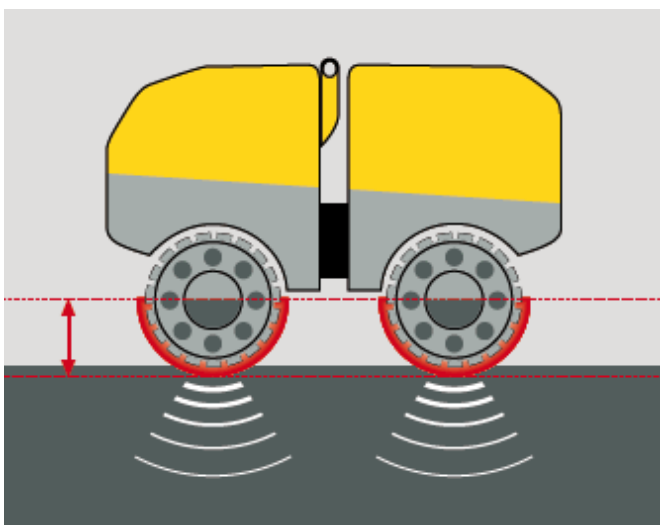



Below the axle exciter in each drum: means more efficient transfer of compaction energy to the soil and improved stability of the machine.

The articulated joint increases the maneuverability around curved building segments, such as manhole covers, without tearing up the ground that has just been compacted.

Technical specifications

	RT 82-SC3 Kubota Motor	RT 82-SC3 Kohler Motor	RT x-SC3 Kubota Motor	RT x-SC3 Kohler Motor
Operating data				
Operating weight kg	1,422	1,450	1,467	1,495
L x W x H mm	1,853 x 820 x 1,270	1,853 x 820 x 1,270	1,853 x 820 x 1,270	1,853 x 820 x 1,270
Drum diameter mm	520	520	520	520
Drum width (min.) mm	820	820	560	560
Drum width (max.) mm	820	820	820	820
Centrifugal force (min.) kN	34.2	34.2	34.2	34.2
Centrifugal force (max.) kN	68.4	68.4	68.4	68.4
Frequency Hz	41.7	41.7	41.7	41.7
Linear force static (per drum) N/mm	9.2	9.6	9.6	10
Linear force dynamic (per drum) N/mm	45	45	45	45
Travel speed forward km/h	1.5	2.5	1.5	2.5
Travel speed reverse km/h	1.5	2.5	1.5	2.5
Turning radius mm	1,600	1,600	1,600	1,600
Surface capacity max. (depending on soil consistency) m ² /h	990	990	990	990
Gradeability max. (without vibration) %	50	50	50	50
Gradeability max. (with vibration) %	50	45	50	45
Engine / Motor				
Engine / Motor type	Water-cooled 3-cylinder diesel engine with electric starter	Water-cooled 3-cylinder diesel engine with electric starter	Water-cooled 3-cylinder diesel engine with electric starter	Water-cooled 3-cylinder diesel engine with electric starter
Engine / Motor manufacturer	Kubota D902	Kohler KDW 1,003	Kubota D902	Kohler KDW 1,003
Displacement cm ³	898	1,028	898	1,028
Operating performance (DIN ISO 3046) kW	15.5	14.8	15.5	14.8
RPM / speed rpm	3,000	3,000	3,000	3,000
Fuel type	Diesel	Diesel	Diesel	Diesel
Fuel consumption l/h	4.5	4.5	4.5	4.5
Tank capacity l	24	24	24	24



**WACKER
NEUSON**
all it takes!

*RTx model drums can be configured for 820mm (32in) or 560mm (22in) width.

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2016 Wacker Neuson SE.